


Emergency Lighting Fixture : Item Code - PEL 111 E/M/P
Mounting : Wall, (Type – Maintained With Photoluminescent)



A wall mounting fitting, consist of single CF – L which provides illumination on normal mains power supply and the same lamp/s continues to provide illumination during mains failure on self contained battery source. **ON** resumption of mains supply, the lamp/s switches back to the mains automatically & simultaneously starts recharging the battery to the required level. **Maintained models provide uninterrupted illumination.**

Dimensions (in mm)

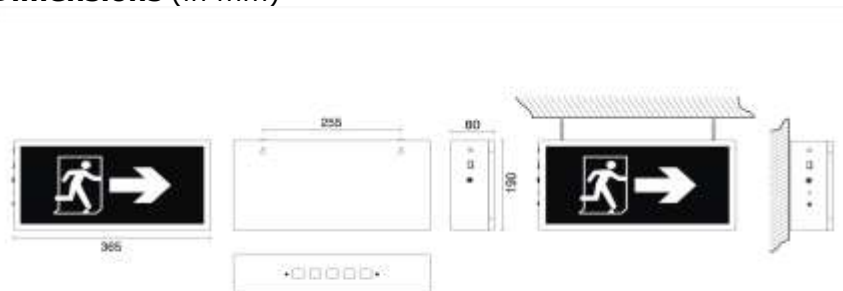

TECHNICAL SPECIFICATIONS

MONOGRAM OF PROLITE

| | |
|---|---|
| Confirms | IS : 9583 – 1981. |
| Ingress Protection | IP – 20. |
| Housing | Made up of C. R. C. A. Sheet steel – 22 S. W. G. |
| Paint & Colour | Epoxy polyester powder coating, White in colour. |
| Diffuser cum message panel | CAD Designed & cut vinyl on 2 M. M. thick milky acrylic. |
| Lamp Holder | 4 pins, straight, Base : 2G7 White polycarbonate/ABS with electrical grade brass contacts. |
| Input (V) | ~ 230 Volts, 50 Hz. |
| Lamp | 1 x CF – L 11 Watts. |
| Lamp make | Osram, Philips, Surya |
| Mains Connector | 5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts. |
| Battery Type | SLA rechargeable. |
| Duration | 180 Minutes back up; \pm 10%. |
| Charging Type | Constant voltage charger. |
| Recharging Cycle | 10 to 12 hours recharging period. |
| Weight (Kg) | 1 Kg. Approx |
| Indications | Red LED "ON" indicates charging. |
| Application | Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking. |
| Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified. | |
| Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | |
| Due to continuous development, specifications may change without prior notice. | |

FOR

PROLITE AUTOGLO LIMITED

DATE :