


**Emergency Lighting Fixture : Item Code - PEL 118 E/NM/AS  
Mounting : Wall, (Type – Non - Maintained)**



A wall mounting fitting, consist of single FT – L which provides illumination on normal mains power supply and the same lamp/s continues to provide illumination during mains failure on self contained battery source. **ON** resumption of mains supply, the lamp/s switches back to the mains automatically & simultaneously starts recharging the battery to the required level. **Non- Maintained models provide uninterrupted illumination.**

**Dimensions (in mm)**

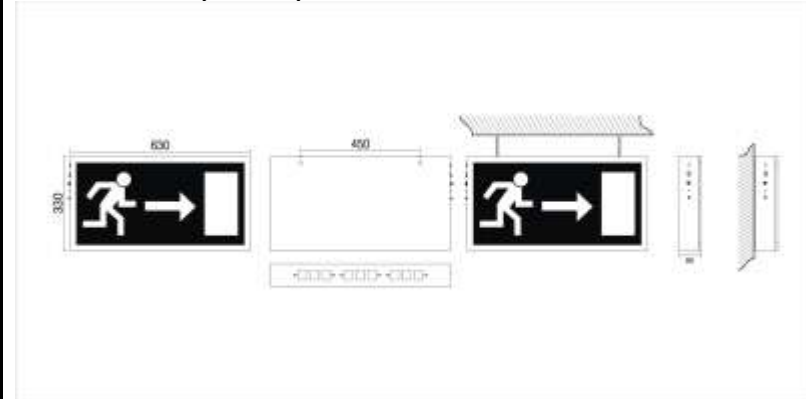

**TECHNICAL SPECIFICATIONS**

**MONOGRAM OF  
PROLITE**

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up of C. R. C. A. Sheet steel – 22 S. W. G.
Paint & Colour	Epoxy polyester powder coating, White in colour.
Diffuser cum Message Panel	CAD Designed & cut vinyl on 2 M. M. thick milky acrylic/polycarbonate.
Lamp Holder	FT – L, T 8 : 18 Watts – Base G 13 White polycarbonate/ABS with electrical grade brass contacts.
Input (V)	~ 230 Volts, 50 Hz.
Lamp	1 x FT – L 18 Watts.
Lamp make	Osram, Philips, Surya.
Mains Connector	5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts.
Battery Type	SLA rechargeable.
Duration	120 Minutes back up; $\pm$ 10%.
Charging Type	Constant voltage charger.
Recharging Cycle	10 to 12 hours recharging period.
Mounting	Wall fixing with 2 Nos. of holes.
<b>Weight (Kg)</b>	2 kg. Approx
Indications	Red LED "ON" indicates charging.
Application	Large area domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.
Tolerance on overall dimensions is $\pm$ 5 m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request ( <b>POR</b> ).	
Due to continuous development, specifications may change without prior notice.	

**FOR**

**PROLITE AUTOGLO LIMITED**

**DATE :**