


**Emergency Lighting Fixture : Item Code-PEL 108 E/NM/WP (3)
Mounting : Wall/Ceiling, (Type – Non-Maintained)**



Consist of single or more FT – Ls which provides illumination on normal mains power supply and the same lamp/s continues to provide illumination during mains failure on self contained battery source. **ON** resumption of mains supply, the lamp/s switches back to the mains automatically & simultaneously starts recharging the battery to the required level.

Non - Maintained models provide uninterrupted illumination.

Dimensions (in mm)

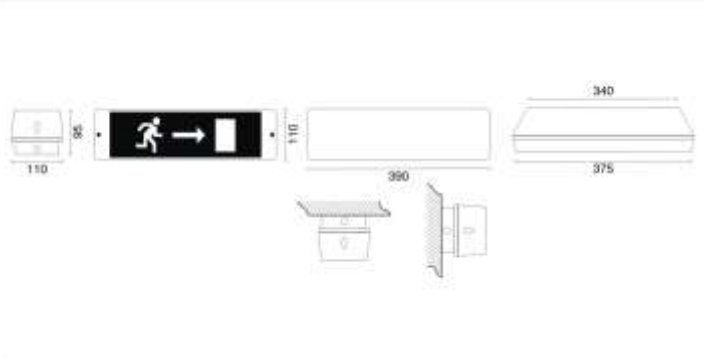

TECHNICAL SPECIFICATIONS

MONOGRAM OF PROLITE

| | |
|----------------------------|---|
| Confirms | IS : 9583 – 1981. |
| Ingress Protection | IP – 65. |
| Housing | Die cast aluminum, white in colour. |
| Diffuser cum Message panel | Molded milky ABS, reeded finish. |
| Reflector | Made up of C. R. C. A. Sheet steel – 22 S. W. G. |
| Paint & Colour | Epoxy polyester powder coating, White in colour. |
| Lamp Holder | FT – L, T 5 : 8 Watts – Base G 5 White Polycarbonate/ABS with electrical grade brass contacts. |
| Input (V) | ~ 230 Volts, 50 Hz. |
| Lamp | 1 x FT – L (T – 5) 8 Watts. |
| Lamp make | ST Or Equivalent |
| Mains Connector | 5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts. |
| Battery type | Ni-Mh/Ni-Cd, rechargeable. |
| Duration | 120 Minutes back up; \pm 10%. |
| Charging Type | Constant current charger. |
| Recharging Cycle | 16 to 24 hours recharging period. |
| Mounting | Surface mounting type. |

Weight (Kg) 1 Kg. Approx

Application For outdoors of domestic & commercial premises, corridors of hotels, Battery & pump rooms, staircases, underground parking.

Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified.

Please Note: Other Input Voltage Is Also Available – Price On Request (**POR**).

Due to continuous development, specifications may change without prior notice.

FOR

PROLITE AUTOGLO LIMITED

DATE :