


PEL LED Hand Rail (Type – Non Emergency)



Dimensions (in mm)

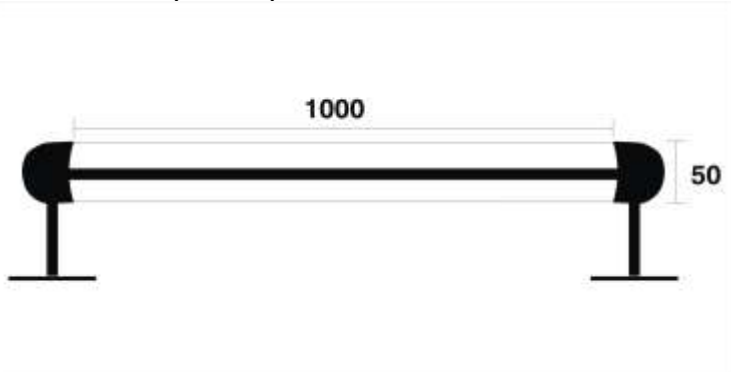

TECHNICAL SPECIFICATIONS

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Stainless Steel Acrylic Hand rail.
Diffuser	Well grooved acrylic rod to provide eye soothing uniform low glow to not to disturb the audience during the show in the darkness.
Input (V)	230 AC Supply. 50 Hz
Output (V)	4.5 VDC 350 mA
LED	1 Watt LED
Make	Eddison, Osram, Philips.
Mounting	On the edge of the step thru 2/4 Nos. of holes.
Application	Commercial purpose, staircase of hotels, auditorium, dark corridors, underground parking.
Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request (POR) .	
Due to continuous development, specifications may change without prior notice.	

FOR,

PROLITE AUTOGLO LIMITED