


PORTABLE Emergency Lighting Fixture : Item Code - PEL LED M (LED Lamp)
Mounting : Wall, (Type – Non Maintained)



Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

Dimensions (in mm)

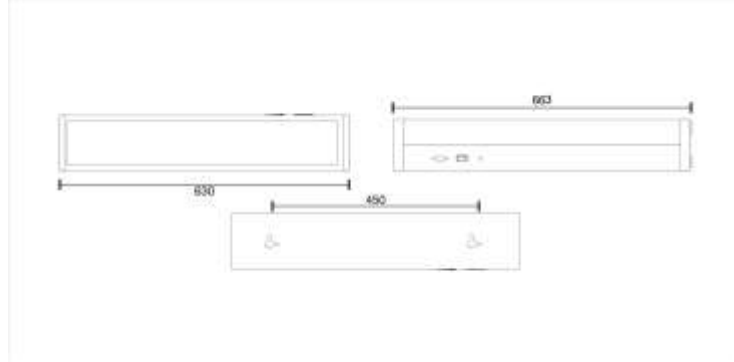

TECHNICAL SPECIFICATIONS

Confirms	IS : 9583 – 1981.
Housing	Made up of C. R. C. A. Sheet steel – 22 S. W. G.
Ingress Protection	IP – 20.
Paint & Colour	Epoxy polyester powder coating, White in colour.
Diffuser	Opal Acrylic Diffuser.
Reflector	Bright finished Metalised polystyrene.
Input (V)	~ 230 Volts, 50 Hz.
LED	Multiple LEDs, high lumens out put.
Lamp make	Yetda, Trulite, Everlite
Mains Connector	5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts.
Battery type	S L A; rechargeable.
Duration	8 Hours back up; \pm 10%.
Charging Type	Constant voltage charger.
Recharging Cycle	10 to 12 hours recharging period.
Mounting	On wall/ceiling thru 2 Nos. of holes.
Weight (Kg)	3 Kg, Approx
Indications	(1) Red LED "ON" indicates charging.
Application	Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.
Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request (POR).	
Due to continuous development, specifications may change without prior notice.	

FOR

PROLITE AUTOGLO LIMITED

DATE :