


**Emergency Lighting Fixture : Item Code - PEL LED E/NE (SS)
Mounting :Surface (Wall/Ceiling), (Type - Non- Emergency)**



An elegant looking, super slim, surface mounting Type, multi LED which provides illumination on normal mains power supply only.

Dimensions (in mm)

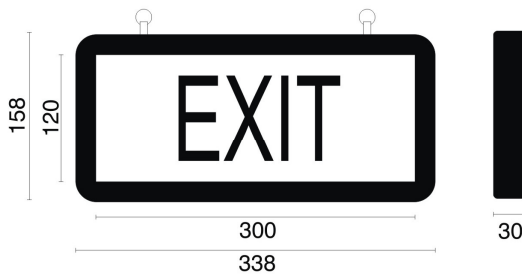

TECHNICAL SPECIFICATIONS

MONOGRAM OF PROLITE

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up of uniformly extruded, aluminum alloy.
Paint & Colour	Epoxy polyester powder coating/anodised, in colour.
Message Panel	CAD Designed printing on 2 M. M. clear acrylic sheet.
Input (V)	~ 230 Volts, 50 Hz.
LED	Multiple LEDs.
Mains Connector	5 A, 250 Volts, PCB Mount with electrical grade brass contacts.
Mounting	Ceiling hanging with 2 Nos. of hooks/rings.
Weight (Kg)	1 Kg. Approx
Application	Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.
Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request (POR) .	
Due to continuous development, specifications may change without prior notice.	

FOR

PROLITE AUTOGLO LIMITED

DATE :