


Emergency Lighting Fixture: Item Code - PEL 1 watt LED NM/ RDL (SQ)



Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

Dimensions (in mm)

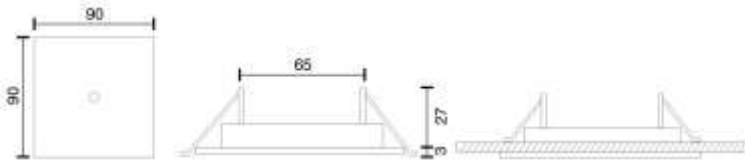

TECHNICAL SPECIFICATIONS

| | |
|---|--|
| Confirms | IS : 9583 – 1981. |
| Ingress Protection | IP – 20. |
| Housing | Aluminum anodized body. |
| Diffuser | Polycarbonate Lens. |
| Input (V) | ~ 230 Volts, 50 Hz. |
| LED | 1 x 1 Watt LED. |
| LED Make | Edison |
| Battery type | Ni-CD/Ni-Mh rechargeable. |
| Duration | 180 minutes back up; \pm 10%. |
| Charging Type | Constant current charger. |
| Recharging Cycle | 16 to 24 hours recharging period. |
| Mounting | Recess Type. |
| Weight (Kg) | 1Kg. |
| Indications | Red LED "ON" indicates charging. |
| Application | For use in domestic & commercial premises, corridors of hotels, staircases, underground parking. |
| Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified. | |
| Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | |
| Due to continuous development, specifications may change without prior notice. | |

FOR

PROLITE AUTOGLO LIMITED

DATE :