


**Emergency Lighting Fixture : Item Code - PEL 108 E/NE (RM)
Mounting : Recess, (Type – Non Emergency)**



Recessed Mounting Type, single FT – L/CF – L which provides illumination on normal mains power supply only.

Dimensions (in mm)

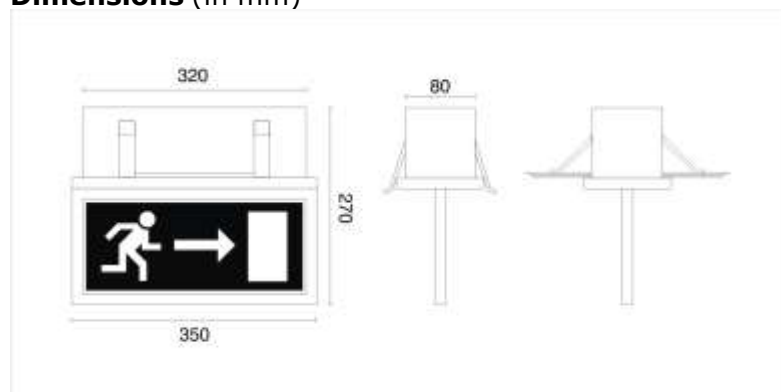

| TECHNICAL SPECIFICATIONS | | MONOGRAM OF PROLITE |
|---|--|----------------------------|
| Confirms | IS : 9583 – 1981. | |
| Ingress Protection | IP – 20. | |
| Housing | Made up of C. R. C. A. Sheet steel – 22 S. W. G. | |
| Paint & Colour | Epoxy polyester powder coating, White in colour. | |
| Message Panel | 8 M. M. Clear acrylic with CAD Designed message. | |
| Reflector | White powder coated M. S., C. A. C. A – 22 S. W. G. | |
| Lamp Holder | CF – L, 4 pins, straight – Base : 2G7 White Polycarbonate/ABS with electrical grade brass contacts. | |
| Input (V) | ~ 230 Volts, 50 Hz. | |
| Lamp | 1 x 8 W T5 / 1 x 11 W CF – L. | |
| Lamp make | Osram, Philips, Surya | |
| Mains Connector | 5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts. | |
| Mounting | Recessed mounting type. | |
| Weight (Kg) | 2 kg. Approx | |
| Application | Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking. | |
| Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified. | | |
| Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | | |
| Due to continuous development, specifications may change without prior notice. | | |

FOR

PROLITE AUTOGLO LIMITED

DATE :