


**Emergency Lighting Fixture : Item Code - PEL 111 E/NE
Mounting : Wall, (Type – Non Emergency)**



A wall mounting fitting, consist of single CF – L which provides illumination on normal mains power supply only.

Dimensions (in mm):

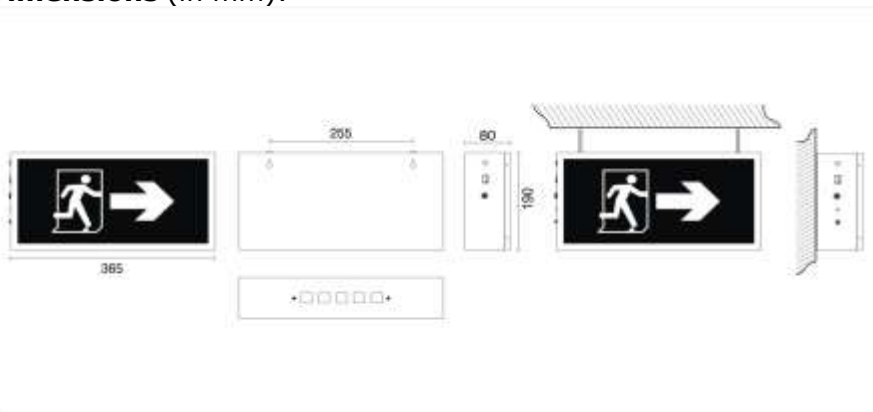

TECHNICAL SPECIFICATIONS

MONOGRAM OF PROLITE

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up of C. R. C. A. Sheet steel – 22 S. W. G.
Paint & Colour	Epoxy polyester powder coating, White in colour.
Diffuser cum message panel	CAD Designed & cut vinyl on 2 M. M. thick milky acrylic.
Lamp Holder	2 pins, straight, Base : GX23 White polycarbonate/ABS with electrical grade brass contacts.
Input (V)	~ 230 Volts, 50 Hz.
Lamp	1 x CF – L 11 Watts.
Lamp make	Osram, Philips, Surya
Mains Connector	5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts.
Weight (Kg)	1 Kg. Approx
Application	Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.

Tolerance on overall dimensions is ± 5 m. m. unless otherwise specified.

Please Note: Other Input Voltage Is Also Available – Price On Request (**POR**).

Due to continuous development, specifications may change without prior notice.

FOR,

PROLITE AUTOGLO LIMITED