


**PORTABLE Emergency Lighting Fixture : Item Code - PEL 111 PNM  
Mounting : Wall, (Type – Non Maintained)**

Portable



Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

**Dimensions (in mm)**

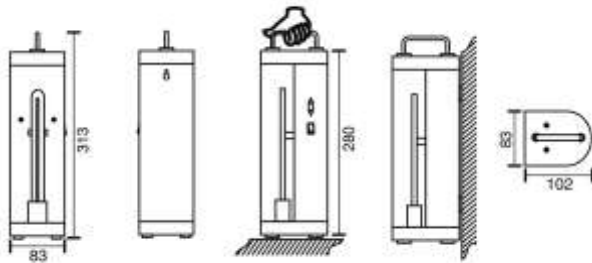

**TECHNICAL SPECIFICATIONS**

Confirms	IS : 9583 – 1981.
Housing	Made up of C. R. C. A. Sheet steel – 22 S. W. G.
Ingress Protection	IP – 20.
Paint & Colour	Epoxy polyester powder coating, White in colour.
Diffuser	Clear acrylic diffuser.
Reflector	Bright finished Metalised polystyrene.
Lamp Holder	4 pins, straight, Base : 2G7 White polycarbonate/ABS with electrical grade brass contacts.
Input (V)	~ 230 Volts, 50 Hz.
Lamp	1 x CF – L (PL – S) 11 Watts : 4 Pins Straight, high lumens out put.
Lamp make	Osram , Philips
Battery type	S L A; rechargeable.
Duration	4 Hours back up; $\pm$ 10%.
Charging Type	Constant voltage charger.
Recharging Cycle	10 to 12 hours recharging period.
Mounting	On wall thru 1 no. of slot.
<b>Weight (Kg)</b>	2 Kg Approx.
Indications	(1) Red LED "ON" indicates charging.
	(2) Green LED "ON" indicates stand by mode.
Application	Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.
Tolerance on overall dimensions is $\pm$ 5 m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request ( <b>POR</b> ).	
Due to continuous development, specifications may change without prior notice.	

**FOR**

**PROLITE AUTOGLO LIMITED**

**DATE :**