


**Emergency Lighting Fixture : Item Code - PEL 125 BL
Mounting : Wall/Portable, (Type – Non Maintained)**



Consist of single 25 Watts incandescent lamp, automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

Dimensions (in mm)

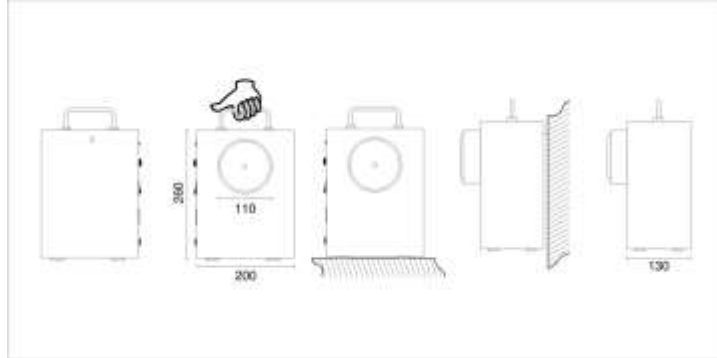

TECHNICAL SPECIFICATIONS

MONOGRAM OF PROLITE

| | |
|---|---|
| Confirms | IS : 9583 – 1981. |
| Ingress Protection | IP – 20. |
| Housing | M. S., C. R. C. A. fabricated, 22 S. W. G. |
| Diffuser | Hardened Glass. |
| Reflector | Well countered, Electrochemically brightened, made up of C. R. C. A. Sheet steel. |
| Paint & Colour | Epoxy polyester powder coating, White in colour. |
| Input (V) | ~ 230 Volts, 50 Hz. |
| Lamp | 1 x 25 Watts. |
| Mains Connector | 5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts. |
| Battery type | SLA Rechargeable. |
| Duration | 180 Minutes back up; \pm 10%. |
| Charging Type | Constant voltage charger. |
| Recharging Cycle | 10 to 12 hours recharging period. |
| Mounting | Wall/Portable type. |
| Weight (Kg) | 5 Kg. Approx |
| Indications | Red LED "ON" indicates charging. |
| Application | For outdoors of domestic & commercial premises, corridors of hotels, Battery & pump rooms, staircases, underground parking. |
| Additional Features | Suitability to adopt one extra FT – L from two pin socket provided. |
| Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified. | |
| Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | |
| Due to continuous development, specifications may change without prior notice. | |

FOR

PROLITE AUTOGLO LIMITED

DATE :