


**Emergency Conversion Module**  
**Mounting : Can be complied with the existing fitting.**  
**(Type – Maintained/Non Maintained/Sustained)**



A unique; innovative, power pack unit, suitable for all types of CF – L/FT – L (**4 Pins ONLY**), of varying wattages from 5 to 58 watts; working on ferromagnetic/electronic ballast (**Ballast to be an external part of the lamp**). Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

**Dimensions (in mm) :**

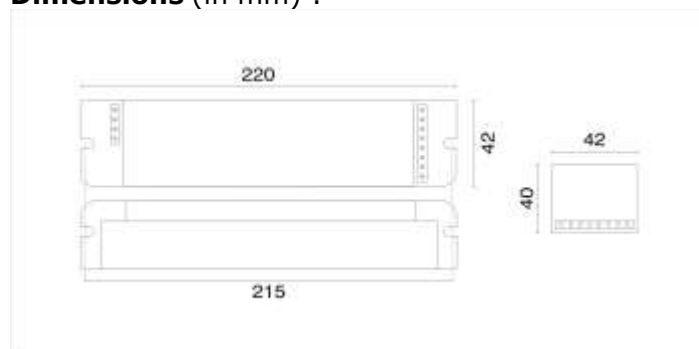

<b>TECHNICAL SPECIFICATIONS</b>		<b>MONOGRAM OF PROLITE</b>
Confirms	IS : 9583 – 1981.	
Ingress Protection	IP – 20.	
Housing	M. S., C. R. C. A. Housing of 22 S. W. G.	
Paint & Colour	Epoxy polyester powder coating, White in colour.	
Lamp	Suits to any wattage of CF – L/FT – L ( <b>4 Pins ONLY</b> ) & Low wattage halogen lamp.	
Input (V)	~ 230 Volts, 50 Hz.	
Mains Connector	5 A, 250 Volts, mounted on PCB, with electrical grade brass contacts.	
Battery type	Ni-Mh/Ni-Cd Rechargeable.	
Duration	60 Minutes back up; $\pm$ 10%. As per Client Requirements.	
Charging Type	Constant current charger.	
Recharging Cycle	16 to 24 hours recharging period.	
Mounting	Can be complied with the existing fitting.	
Indications	Red LED "ON" indicates charging.	
Application	Very useful when self contained Emergency Lighting is undesirable from an aesthetic point of view, such as office of high profile Chairperson/M. D./ C. E. O.	
Tolerance on overall dimensions is $\pm$ 5 m. m. unless otherwise specified.		
Please Note: Other Input Voltage Is Also Available – Price On Request ( <b>POR</b> ).		
Due to continuous development, specifications may change without prior notice.		

**FOR**

**PROLITE AUTOGLO LIMITED**

**DATE :**