


**Emergency Lighting Fixture : Item Code - PEL LED E/NE (SM)
Mounting : Surface (Wall/Ceiling), (Type – Non Emergency)**



Recessed Mounting Type, multi LED unit, which provides illumination on normal mains power supply only.

Dimensions (in mm)

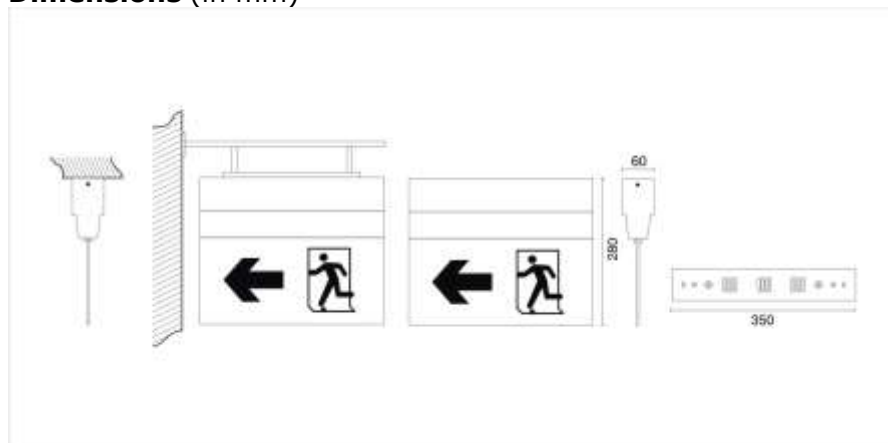

TECHNICAL SPECIFICATIONS	MONOGRAM OF PROLITE
---------------------------------	----------------------------

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up of C. R. C. A. Sheet steel – 22 S. W. G.
Paint & Colour	Epoxy polyester powder coating, White in colour.
Message Panel	8 M. M. Clear acrylic with CAD Designed message.
Reflector	Multi faceted, electrochemically brightened & anodized aluminum reflector to enhance intensity of light.
Input (V)	~ 230 Volts, 50 Hz.
LED	Multiple LEDs.
Mains Connector	5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts.
Mounting	Recessed mounting type.
Weight (Kg)	1 Kg. Approx
Application	Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.
Tolerance on overall dimensions is \pm 5 m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request (POR).	
Due to continuous development, specifications may change without prior notice.	
OPTIONAL ATTACHMENTS ARE AVAILABLE FOR WALL/CEILING MOUNTING AS SHOWN IN THE PHOTOGRAPH AT AN EXTRA COST.	

FOR

PROLITE AUTOGLO LIMITED

DATE :