


**Emergency Lighting Fixture : Item Code - PEL LED M (DC)  
Mounting : Ceiling Hanging, (Type – Maintained)**



A ceiling hanging mounting, decorative & attractive range of **LED** lights, Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.  
**Maintained models provide uninterrupted illumination.**

**Dimensions** (in mm)

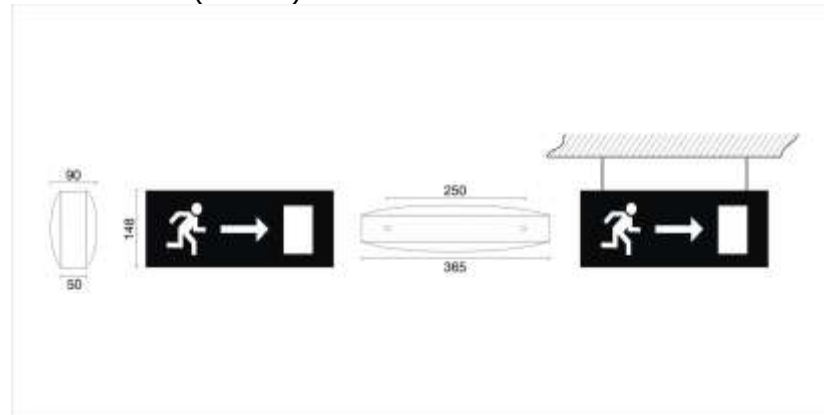

**TECHNICAL SPECIFICATIONS**

**MONOGRAM OF PROLITE**

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up of C. R. C. A. Sheet steel – 22 S. W. G.
Paint & Colour	Epoxy polyester powder coating, White in colour.
Diffuser cum message panel	Double sided, Semi transparent, molded ABS with CAD Designed & cut vinyl pasted.
Input (V)	~ 230 Volts, 50 Hz.
LED	Multiple LEDs.
Mains Connector	5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts.
Battery type	Ni-Mh/Ni-Cd, rechargeable.
Duration	120 Minutes back up; $\pm$ 10%.
Charging Type	Constant current charger.
Recharging Cycle	16 to 24 hours recharging period.
Mounting	Ceiling hanging.
<b>Weight (Kg.)</b>	1 Kg. Approx
Application	Domestic & commercial purpose, corridors of hotels, Battery rooms, staircases, underground parking.

Tolerance on overall dimensions is  $\pm$  5 m. m. unless otherwise specified.

Please Note: Other Input Voltage Is Also Available – Price On Request (**POR**).

Due to continuous development, specifications may change without prior notice.

**OPTIONAL ATTACHMENTS ARE AVAILABLE FOR WALL/CEILING MOUNTING AS SHOWN IN THE PHOTOGRAPH AT AN EXTRA COST.**

FOR

**PROLITE AUTOGLO LIMITED**

DATE :