


**PORTABLE Emergency Lighting Fixture : Item Code - PEL LED PNM (R)  
Mounting : Wall, (Type – Non Maintained)**



Automatically switches – **ON**, on mains power failure & provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on the resumption of mains supply. Once the battery is fully charged, it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

**Dimensions (in mm)**

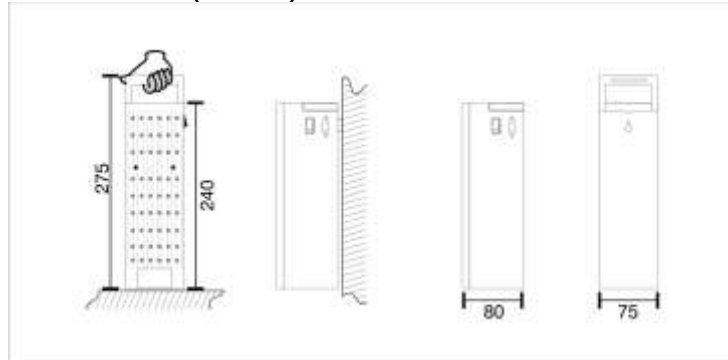

**TECHNICAL SPECIFICATIONS**

Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up of white ABS molded plastic, with inbuilt handle for ease to carry with.
Diffuser	Reeded clear, molded polycarbonate diffuser.
Input (V)	~ 230 Volts, 50 Hz.
Lamp	1 x LED – L (PL – S) 5 Watts: high lumens out put.
Lamp make	Yetda, Trulite, Starlite, Everlite.
Mains Connector	5 A, 250 Volts, Milky white Polycarbonate with electrical grade brass contacts.
Battery type	S L A; rechargeable.
Duration	10 Hours back up; $\pm 10\%$ .
Charging Type	Constant voltage charger.
Recharging Cycle	10 to 12 hours recharging period.
Mounting	Table top type/Mounting to wall through one no. slot.
<b>Weight (Kg)</b>	2 Kg. Approx
Indications	(1) Red LED "ON" indicates charging.
	(2) Green LED "ON" indicates stand by mode.
Application	Domestic & commercial purpose.
Tolerance on overall dimensions is $\pm 5$ m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request ( <b>POR</b> ).	
Due to continuous development, specifications may change without prior notice.	

**FOR**

**PROLITE AUTOGLO LIMITED**

**DATE :**